



PRODUCT SPOTLIGHT:

LVA100 TWO STAGE 100MM LOUVRE BLADE

High Performance Louvres

Our High-Performance Louvres have been simulated to perform to a class A water rating to AS4740. Suitable for all 100mm or larger framing platforms.

SUITABLE FOR:


- Data Centres
- Commercial
- Storage Facilities



CLASS A
WATER RESISTANCE



3.5M/S
CORE VELOCITY



SUITABLE FOR
ALL 100MM FRAMING
PLATFORMS OR BIGGER




AVAILABLE IN
POWDER-COATED OR
ANODISED FINISHES






CLASS 4
AIRFLOW
PERFORMANCE

51%

FOA
FREE OPEN AREA



INSTALLATION
HORIZONTAL
OR VERTICAL

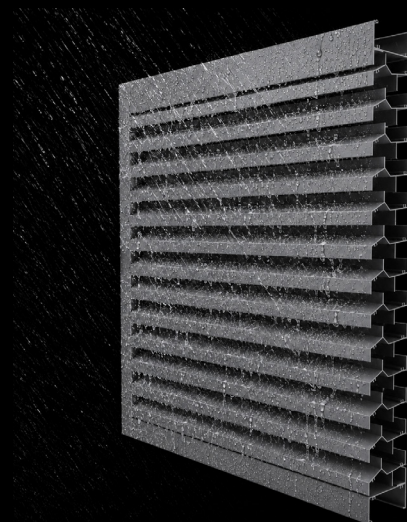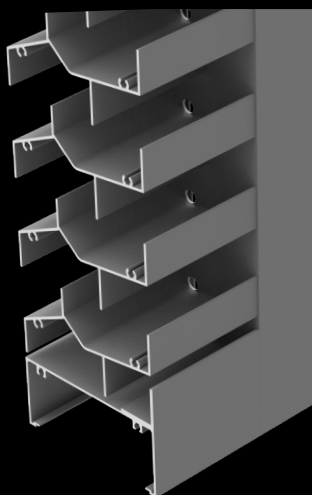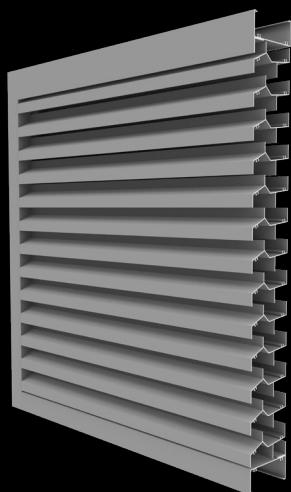

Data is based on theoretical section properties. Performance data extracted from Computational Fluid Dynamics (CFD) modelling and test methodology was designed to replicate AS 4740:2025, performance under other methods and conditions may differ. Coefficient of Discharge (Cd) value may be within +/- 5%.