




Hunter Evo

Double Flush Glazed Framing

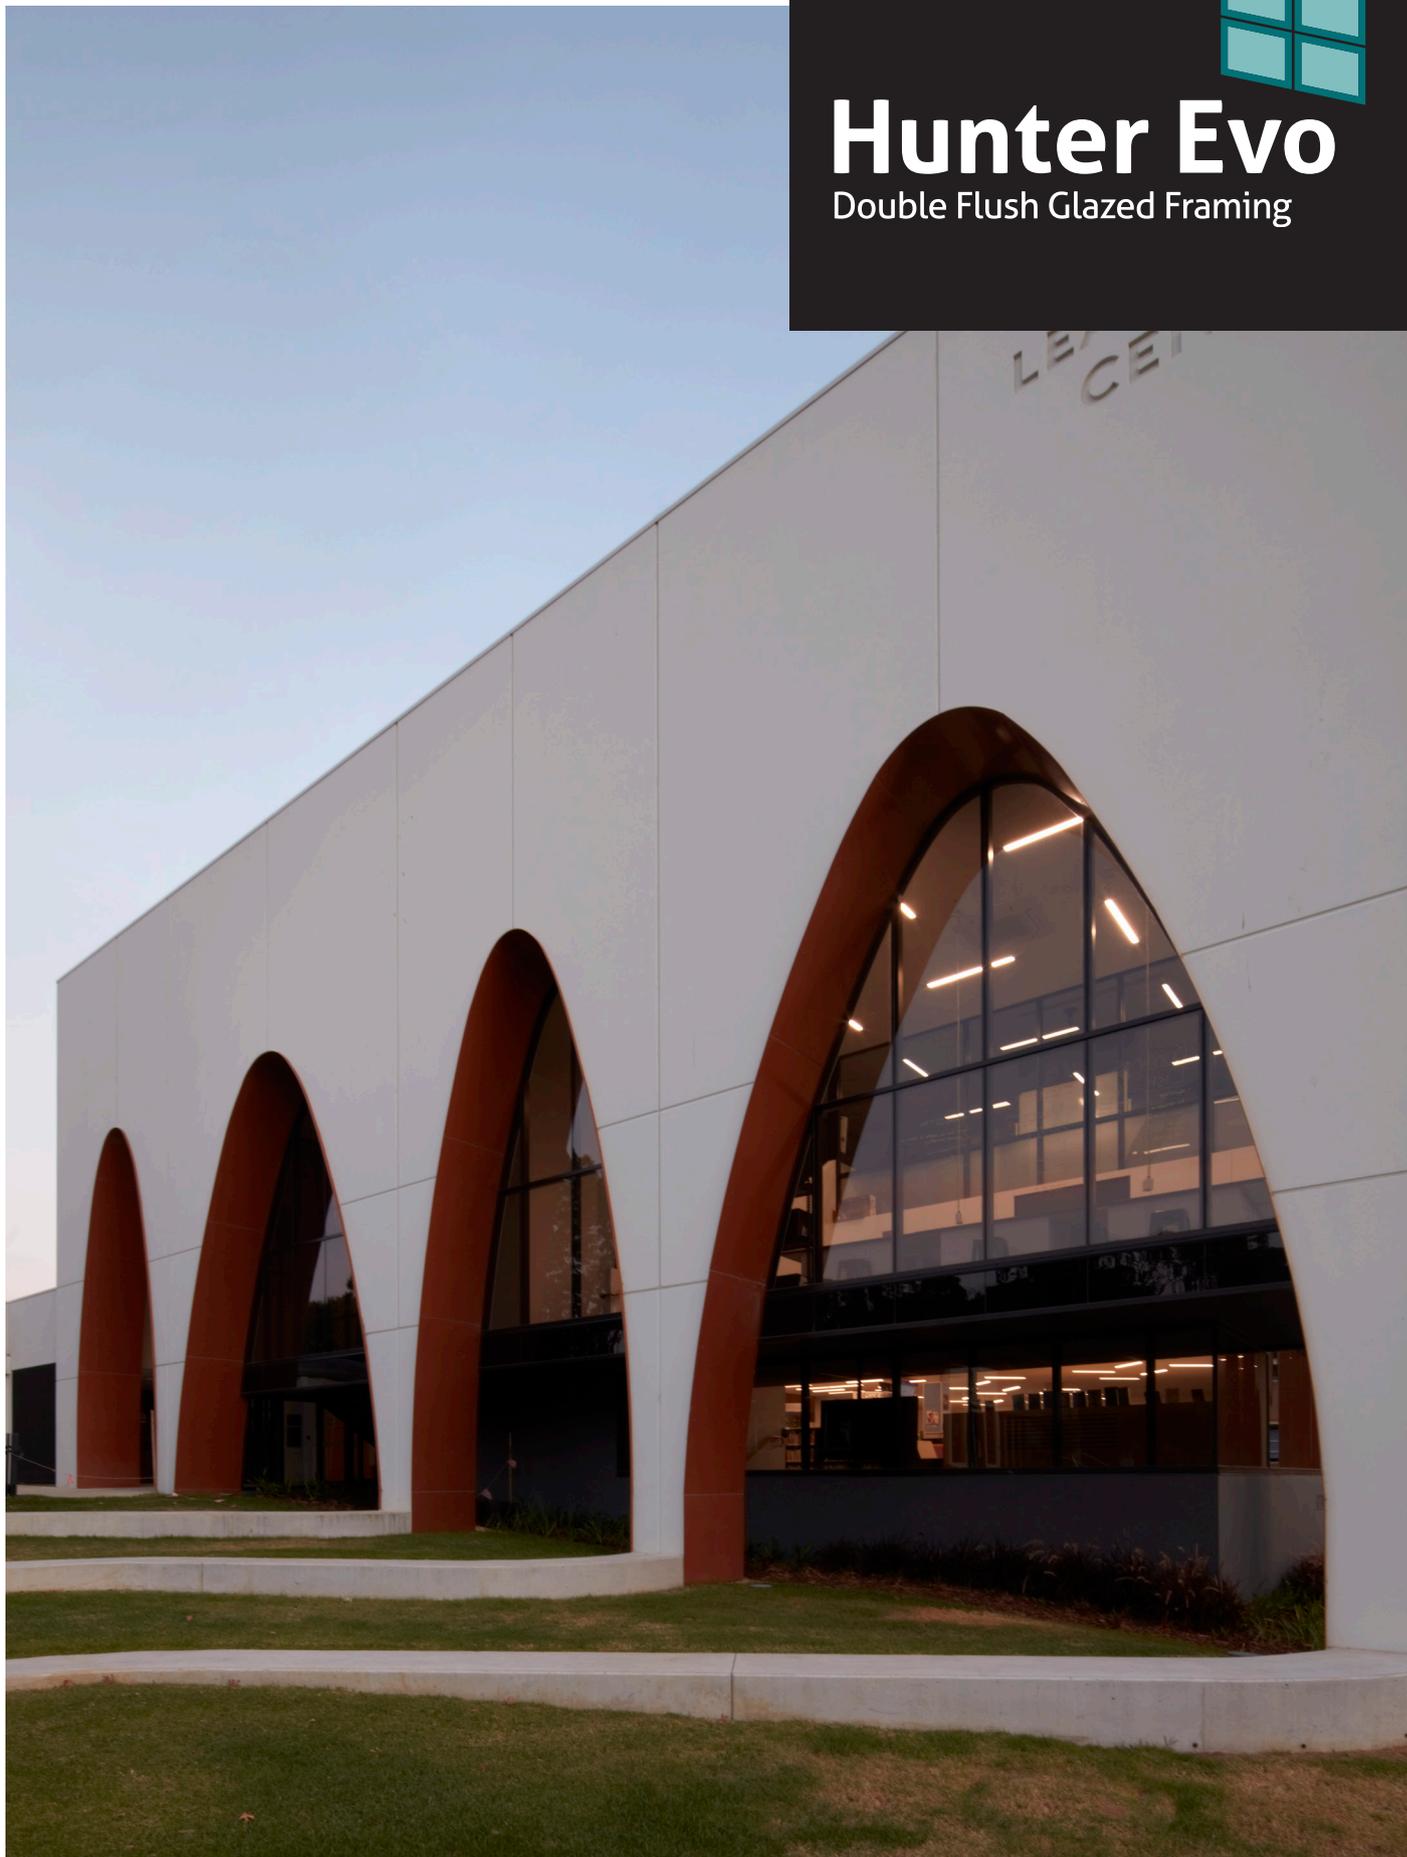

Double Flush Glazed Framing

The Hunter Evo Double Flush Glazed Framing is the most versatile and flexible of the Alspec Commercial Framing Systems. Available in a frame depth of 101.6mm x 50mm and 150mm x 50mm, it is ideal for shopfronts.

With its straight cuts and flush glazing the Hunter Evo not only looks good, but is easy to fabricate and easy to install. Suitable for a range of double glazed glass thickness options to address the most demanding energy requirements. With self draining sub sills it also solves water leakage problems. The system can be internally or externally glazed along with incorporating the flexibility and appeal of gently curved or faceted frame installations. The Hunter Evo also provides a seamless interface with Alspec's extensive product offer.



Key Features

- Sharp unbroken lines
- Flush glazed appearance
- Robust frame
- Up to 40mm double glazed
- Easily adapts to Alspec's awnings and hinged doors

Technical Specifications


Frame Dimensions		
Option 1	101.6 x 50mm	
Option 2	150 x 50mm	
Maximum Recommended Sizes		
	101.6mm Frame	150mm Frame
Height	4200mm	4500mm
Width	2400mm	2400mm
Maximum Product Performance		
	101.6mm Frame	150mm Frame
SLS (Pa)	3500	6000
ULS (Pa)	8900	9000
Water (Pa)	1200	1000

Acoustic Performance		
Glass Type	Rw (C; C _{tr})	
6.38mm/ 12mm/ 6.38mm IGU	36 (-1,-5) dB	
Glazing Details		
	101.6mm Frame	150mm Frame
Glass Position	Front	Front
Double Glazed	15 - 30mm	15 - 40mm
Thermal Performance		
	101.6mm Frame	150mm Frame
Uw range DG	2.4 - 3.6	2.9 - 3.9
SHGC range DG	0.17 - 0.64	0.16 - 0.64

Compatible Systems
Swan Evo 45mm Commercial Shopfront Door
Torrens 45mm Commercial Shopfront Door
35/50mm Awning Window
ProTilt High Performance Awning/Casement
ProGlide High Performance Sliding Door
Altitude Apartment Sliding Door
ProVista Sashless Double Hung Window

Typical Configurations

101.6mm



150mm

