


# Select Bi-Fold



# Select Bi-Fold

A premium solution for those seeking superior functionality and style in the alfresco area of their home. It has been internally designed to blend with the hardware. All locks and flush bolts blend seamlessly with the custom extrusion for a professional finish.

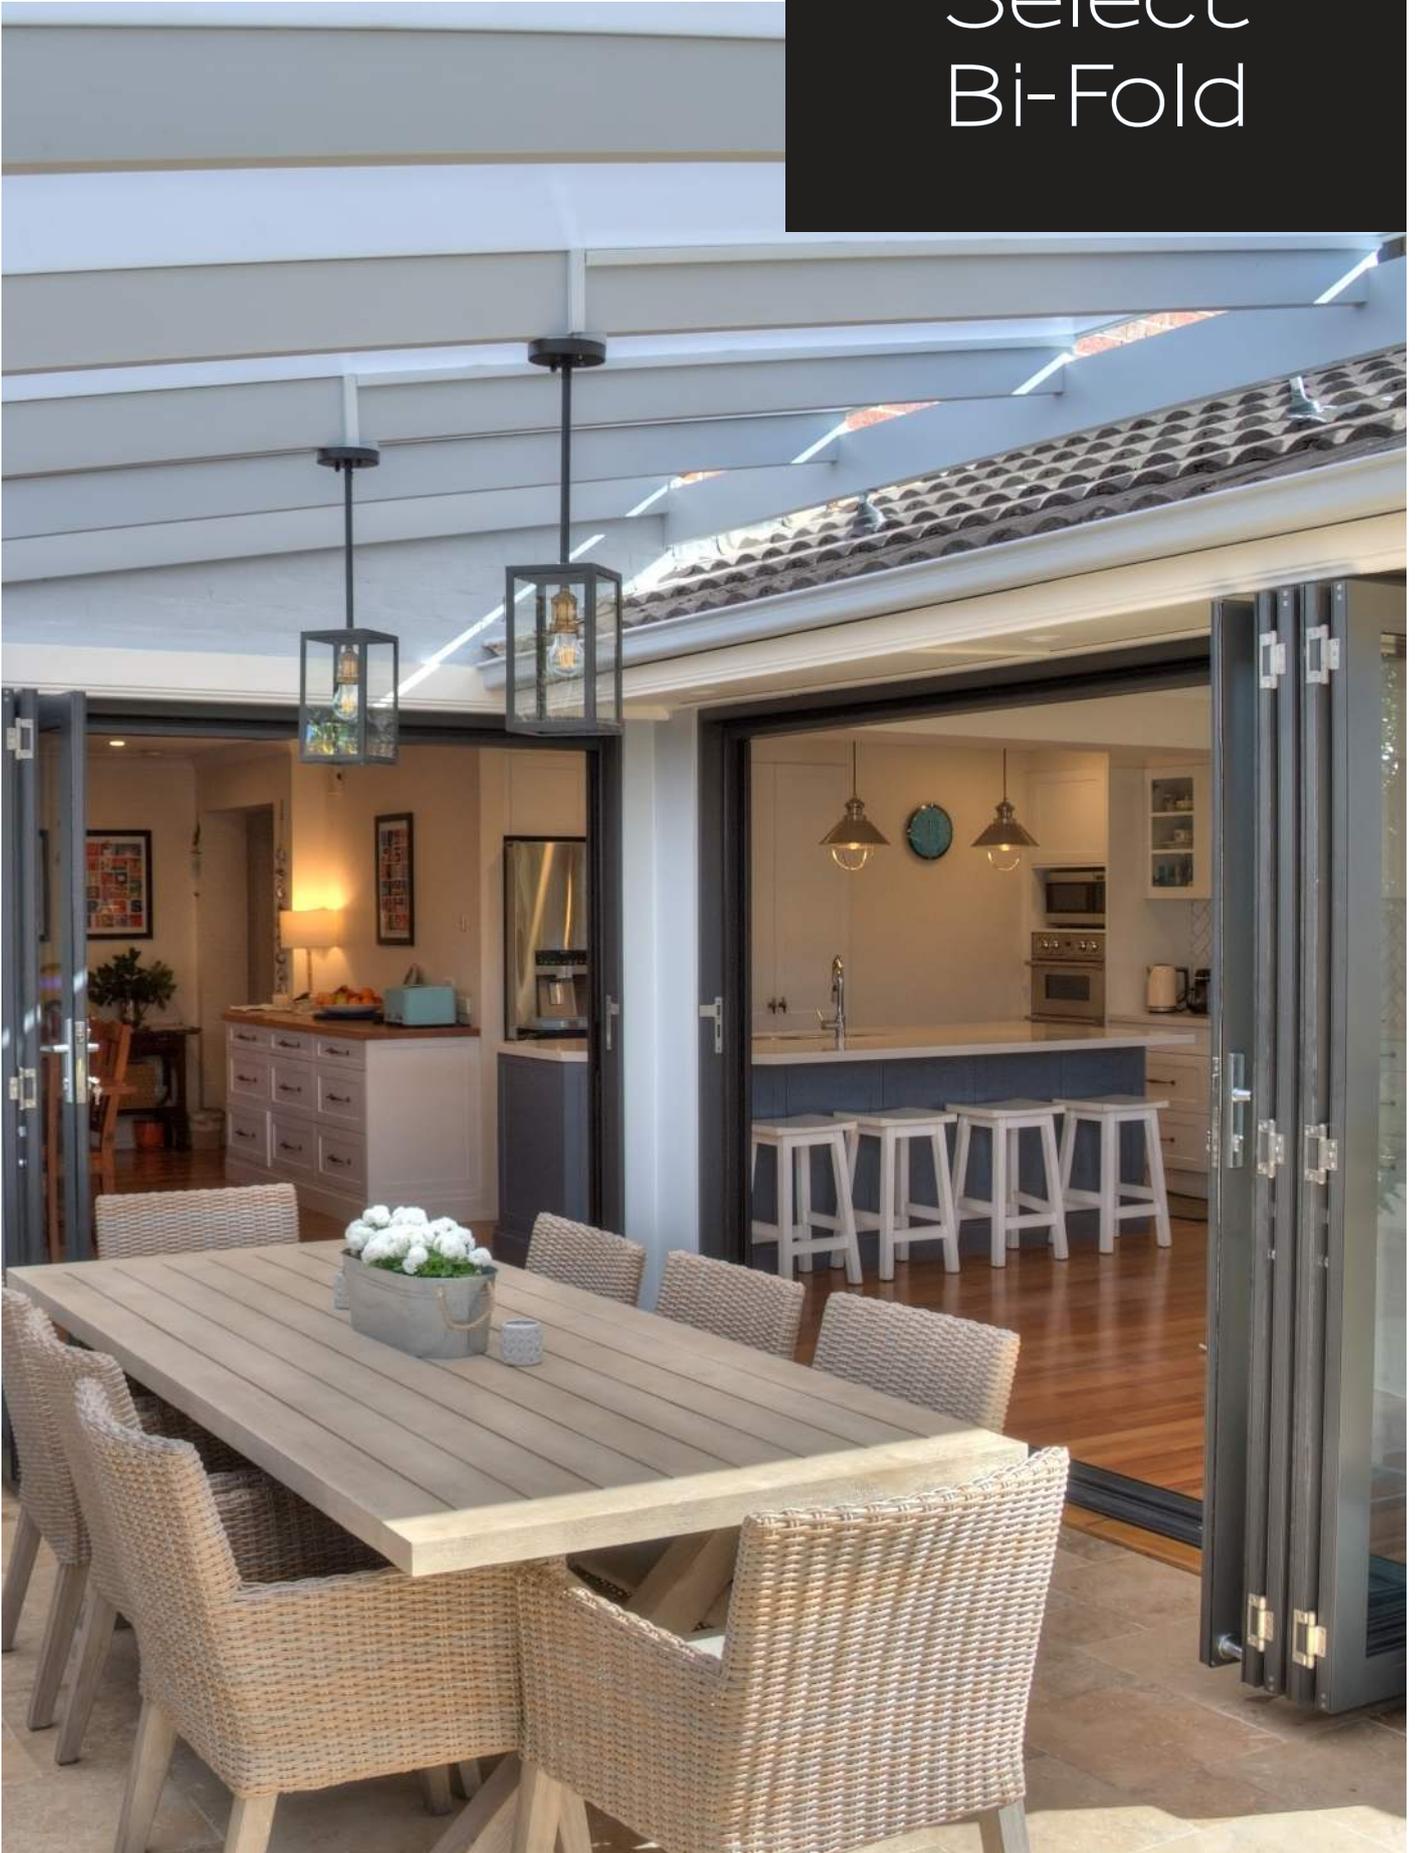

## Key Features

- The Carinya Select Top and Bottom Bi-Fold System features flat sill options for smooth accessibility and optional mid rails with multi-point locking in a range of opening configurations.
- For a modern designer look, the Carinya Bi-Fold extrusions are a consistent 85mm wide face on both the stiles and rails.
- The Bottom rolling Bi-Fold system features the innovative F2/F3 Centor Bottom rolling hardware which overcomes the requirement for any structural beam as needed in a conventional top hung Bi Fold system.
- The Top rolling Bi-Fold system features the Alspec commercial grade E2A Centor rolling hardware which has been used and proven overtime in commercial projects.

## Technical Specifications

Maximum sash height	2400mm
Maximum sash width	900mm
Maximum single glazed thickness	10.5mm
Maximum double glazed thickness	24mm
Maximum sash weight	40kg (F2), 80kg (F3), 40kg (E2A)
92mm frame	

Subject to site conditions



## Typical Configurations

